


Model : 330L / S

FSL-330L/S provides soft and uniform lighting in relatively short distances with the help of its six 55W fluorescent lamps and the aluminum barndoors. This product is manufactured in either a single row or a double row configuration, and it is possible to control the intensity of its light either manually or with the DMX protocol. Angle of light projection is adjustable manually or with the pole operated gearbox control lever.

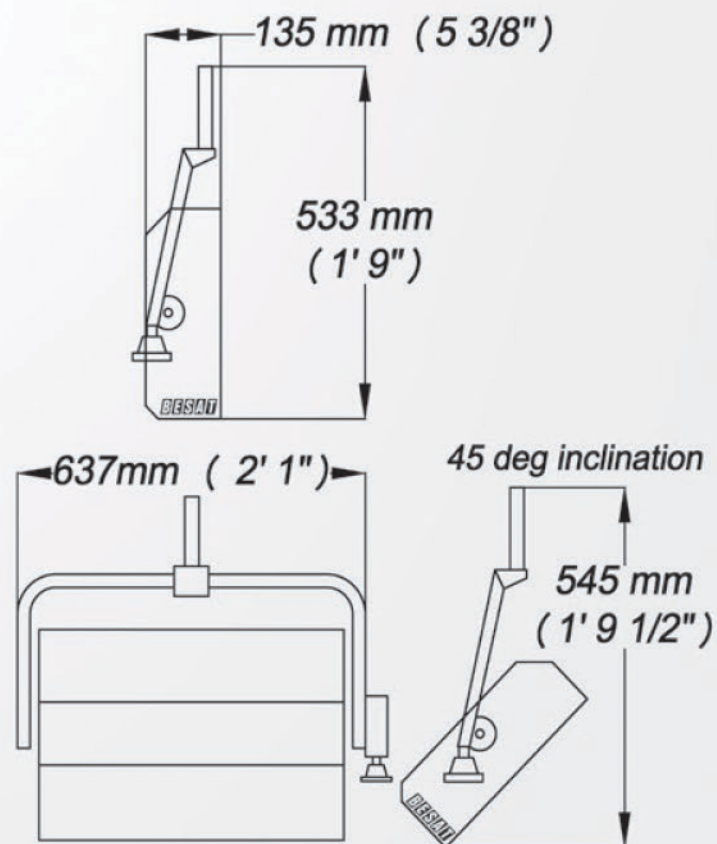

Specification

Input Voltage:	200~240V
Power:	330 W
Lamp:	6x55 W - video line
Weight:	9.52 Kg