




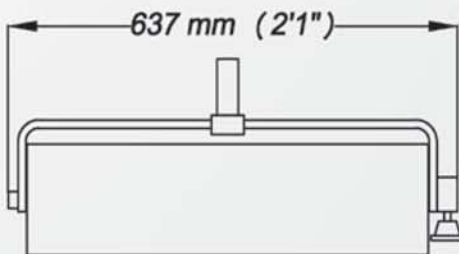


Model : FSL-110L / S

FSL-110L/S provides soft and uniform lighting in relatively short distances with the help of its two 55W fluorescent lamps and the aluminum barndoors. This product is manufactured in either a single row or a double row configuration, and it is possible to control the intensity of its light either manually or via the DMX protocol. Angle of light projection is adjustable manually or with the Pole Operated gear-box control lever.



45 deg inclination

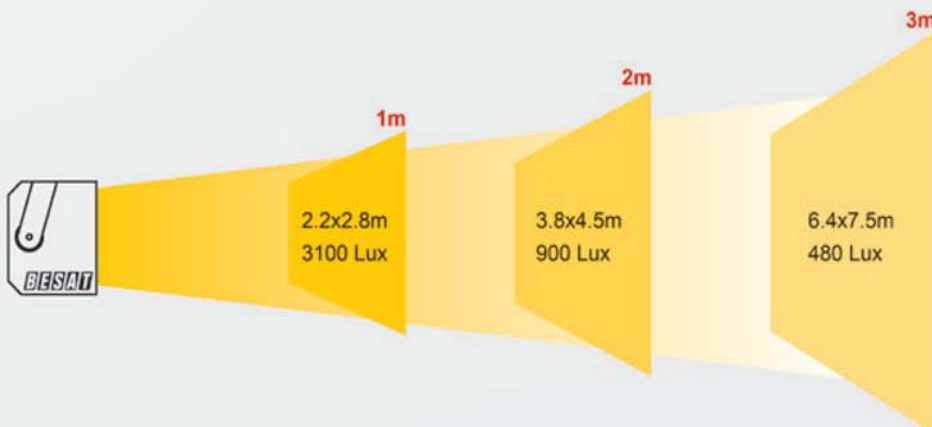

Specification

Input Voltage:	200 ~ 240V
Power:	110 W
Lamp:	2x55 W - video line
Weight:	4.54 Kg